


Steel frame for ease of carrying and protecting the components.

Pressure Adjustor Relief valve (inside the tank)

Pressure Relief Button can release the pressure in the system in-case the pump stops

Light weight design thereby reducing the total tool and pump weight package

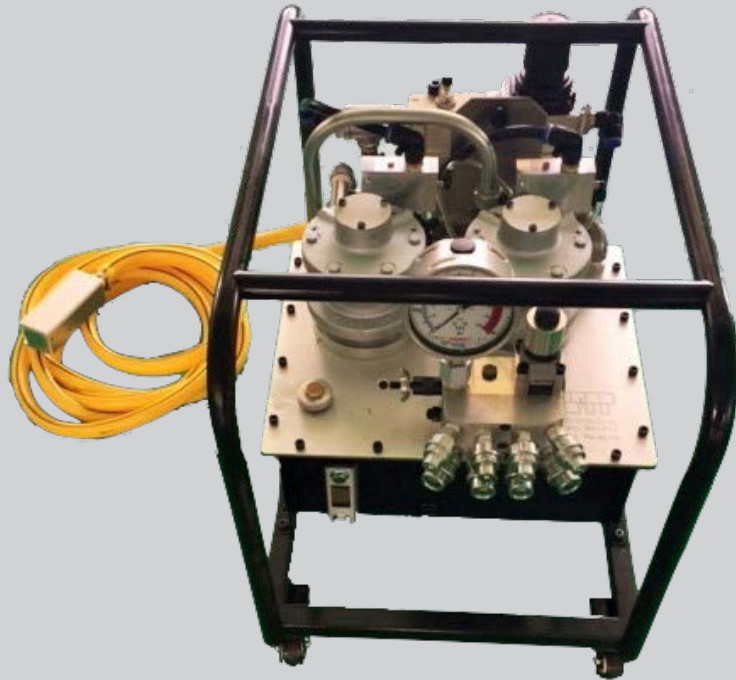

Model	TWIN-LAPP5-2	TWIN-LAPP5-4
Working pressure	10000 psi	10000 psi
Drive	Air	Air
Supply	100psi air pressure	100psi air pressure
Power (HP)	4.0	4.0
Tank capacity (Gallon)	2.90	2.90
Max. Oil Flow:	1200 cu.in/min	1200 cu.in/min
Oil cooler	N/A	N/A
Weight (lbs)	97	97
Oil outputs	4 x 1/4" NPT	8 x 1/4" NPT
LxWxH (inch)	22.00 X 17.00 X 19.00	22.00 X 17.00 X 19.00

- Use with input air from 80~100 Psi
- Three stages, compact design
- Applicable for both one or two wrenches
- Aluminum oil tank with oil gauge and motor
- 4" diameter pressure gauge
- Variable pressure adjustment between 1000-10000 psi
- The Single valve block can be replaced by component FP-4, thereby allowing 2 or 4 Tools to be driven simultaneously

